



now with

Duro-Xtreme®

MAKE YOUR FLOOR A FOCAL POINT

TRANSFORM YOUR SPACE BY UPGRADING YOUR FLOORING. DISCOVER THE BEST FLOORING OPTION FOR YOUR VEHICLE.

LOCKTILE®, NOW WITH DURO-XTREME® IS THE LUXURY VINYL TILE SOLUTION TO AN "INSTANT" FLOOR MAKE-OVER.

LOCKTILE® ENABLES YOU TO BRING A SPECIAL BRAND OF STYLE AND ELEGANCE TO ANY RESIDENTIAL ENVIRONMENT.

LOCKTILE® IS AN INNOVATIVE "INTER-LOCKING"
FLOORING SOLUTION THAT WILL ENHANCE,
SAVE TIME, IMPROVE EFFICIENCY AND CREATE
AN OVERALL BEAUTIFUL APPEARANCE.

LOCKTILE® IS AN "INSTANT SELF- LAY
FLOOR" WHICH DOES NOT REQUIRE GLUE,
PROFESSIONAL LABOR OR DOWN-TIME.

TO REQUEST FREE SAMPLES CALL OR EMAIL US
AT:888-594-7800 • INFO@TECLIFTS.COM


AMERICAS LEADING MANUFACTURER OF VINYL INTERLOCKING FLOOR TILES









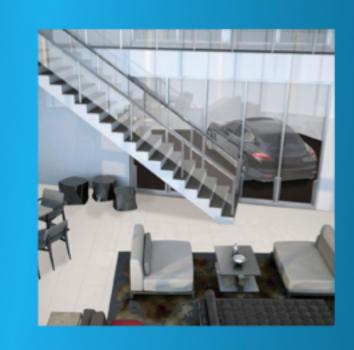







now with

Duro-Xtreme®







now with

Duro-Xtreme°



PRODUCTS

LockTile® is available in 13 beautiful colors at any quantity and color can be customized when purchasing larger quantities.

OUR PRODUCTS INCLUDE:


- COIN (RAISED DISC) SURFACE TILES
- SMOOTH SURFACE TILES
- EDGING
- HIGH PERFORMANCE TILE COATINGS & ADHESIVE

To request free samples call or email us at:

888-594-7800

INFO@TECLIFTS.COM



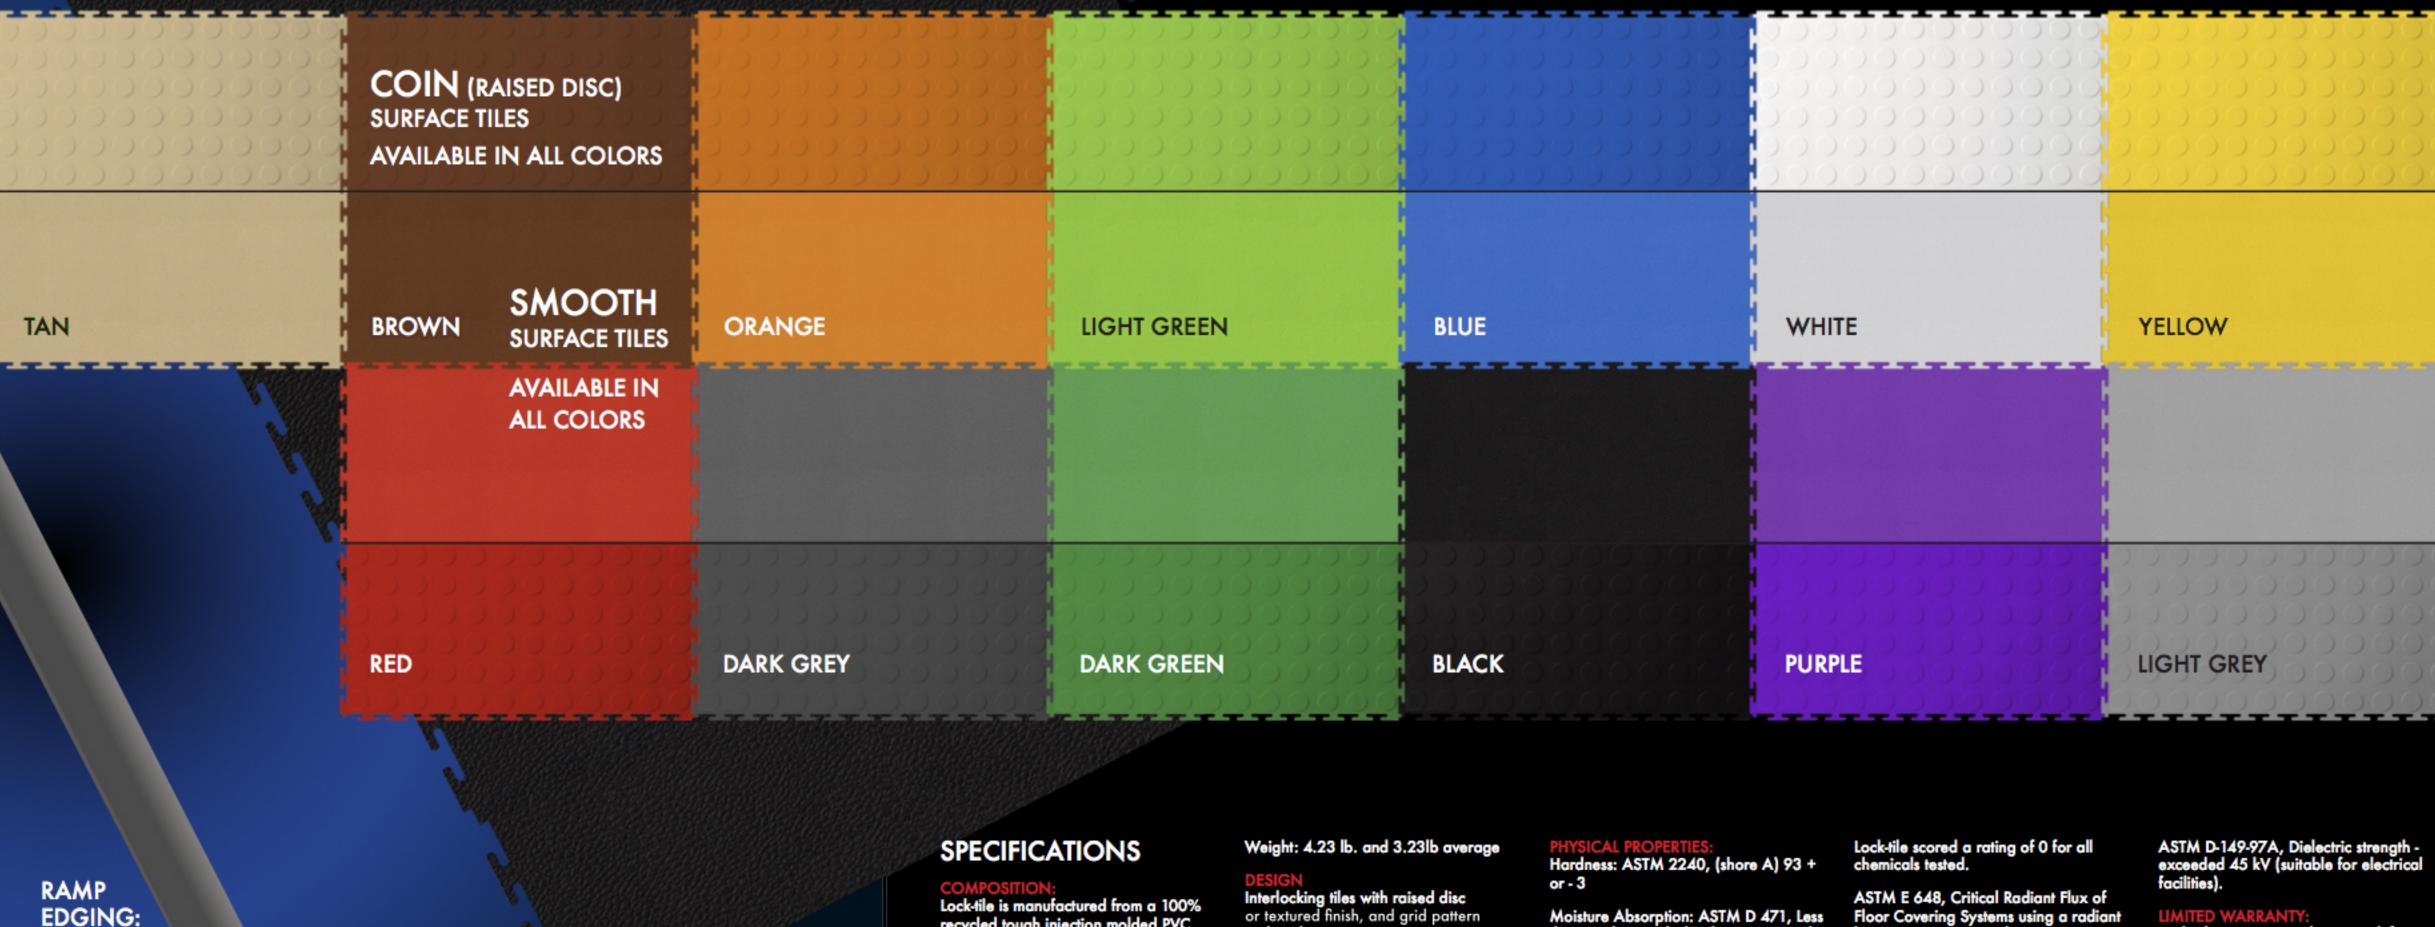

AVAILABLE IN BLACK **AND GREY**

recycled tough injection molded PVC compound.

Size: 1 tile with interlocking joints measures 19 5/8" x 19 5/8"

When interlocked, 4 tiles measure 38 7/8" x 38 7/8"

Thickness: available in 1/4" (7mm) and 3/16" (5mm)

Interlocking tiles with raised disc or textured finish, and grid pattern

General maintenance - damp mop. Cylindrical scrubber with combined vacuum using mild

detergents may also be used. Rot proof and resistant to oil and most chemicals.

Moisture Absorption: ASTM D 471, Less than 3% by weight (72 hours @ 70° F)

Specific Gravity: ASTM D 792, (+ or - .02) 1.37

Tensile Strength: ASTM D 638, 2700 PSI

ASTM F925, Resistance to Chemicals, on a scale of 0-3 and 0 meaning no surface dulling, surface attack, or color change.

Floor Covering Systems using a radiant heat Energy source: Class 1.

ASTM E-662, Standard Test Method for Specific Optical Density of Smoke Generated by Solid Materials: 450 or

ASTM D-2047, Static coefficient of Friction. Conform to American with Disabilities Act (ADA) specifications.

Lock-Tile® is warranted against defects in workmanship and material for thirty years from the date of purchase.





63 George Leven Drive North Attleboro, MA 02760 WWW.TECLIFTS.COM

To request free samples call or email us at: 888-594-7800 • INFO@TECLIFTS.COM