



TEC

TEC 9000XH Storage Lift

9,000 lb Extended-Height Four-Post Lift

**9,000 LB CAPACITY • 85" LIFTING HEIGHT • 11
LOCKING POSITIONS**

Contact for Pricing

The TEC 9000XH is our heaviest four-post lift — 9,000 lb capacity, an 85" lifting height and industry leading runway length and drive-thru width. Cable driven with slack cable safety, single point manual lock release and eleven locking positions, it handles the largest trucks and SUVs and doubles as serious storage.

9,000 lbs.
CAPACITY

85"
LIFTING HEIGHT

11
LOCKING POSITIONS

**115V – 20 Amp /
1PH**
POWER

WHY CHOOSE A TEC 9000XH LIFT?

01

BUILT FOR HEAVIER VEHICLES

Built with high-quality materials, TEC 9000XH lifts are engineered to withstand the largest vehicles. These four posts lift up to 9,000 lbs.

02

ADVANCED SAFETY FEATURES

Safety is our top priority. TEC 9000XH lifts are equipped with state-of-the-art safety mechanisms, including automatic locking systems and overload protection, to keep you and your vehicles secure.

03

VERSATILE APPLICATIONS

Whether for routine maintenance, repairs, or storage, our lifts cater to a wide array of vehicles, from compact cars to larger SUVs and trucks.

04

USER-FRIENDLY DESIGN

With intuitive controls and easy setup, these lifts are designed for professional mechanics and DIY enthusiasts. Enjoy hassle-free operation and maintenance.

05

SPACE-SAVING SOLUTIONS

Maximize your workspace with TEC 9000XH lifts. Their compact design allows for efficient use of space — even for heavier vehicles, they are ideal for both small garages and large commercial workshops.

FEATURES

- Industry leading runway length and drive-thru width
- Single point manual lock release
- Slack cable safety
- Great for storage and/or general commercial service
- Cable driven
- Adjustable locking positions
- Steel approach ramps

INCLUDED WITH EVERY 9000XH LIFT



INCLUDED

**CASTER KIT WITH POLY
WHEELS**



INCLUDED

JACK TRAY



INCLUDED


3 DRIP PANS

SPECIFICATIONS

SPECIFICATION	TEC 9000XH
Lifting Capacity	9,000 lbs.
Lifting Height	85"
Overall Length w/ Ramps	239"
Overall Length w/o Ramps	197"
Overall Width	123"
Overall Width w/ Power Unit	134.5"
Approach Ramp Length	37"
Runway Tread Width	20"
Runway Length	188.5"
Runway Height	4.80"
Column Height	97"
Clearance between Columns	111.5"
Clearance between Runways	39.5"
Outside Runway to Outside Runway	79"
Clearance Under Runways	81"
Drive-Thru Width	99"
Locking Positions	11
Lifting Speed	90 sec.
Power	115V – 20 Amp / 1PH
Ship Weight	2,354 lbs.

Specifications are taken from the TEC 9000XH Series brochure and are subject to change.

DIMENSIONS

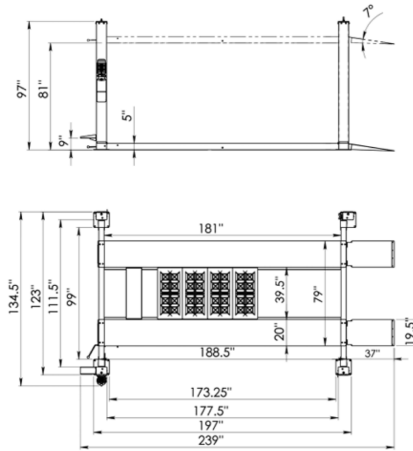

TEC 9000XH DIMENSION DRAWINGS

SITE REQUIREMENTS

OVERHEAD OBSTRUCTIONS

The area where the lift will be located should be free of overhead obstructions such as heaters, building supports, electrical lines etc.

FLOOR REQUIREMENTS

Visually inspect the site where the lift is to be installed and check for cracked or defective concrete. This lift must be installed on a solid level concrete floor with no more than 2 degrees of slope. A level floor is suggested for proper installation and level lifting. If a floor is of questionable slope, consider a survey of the site and/or the possibility of pouring a new level concrete slab. This lift is designed to be installed on a minimum of 4" thick, 3000psi, steel reinforced concrete. Do not install this lift on asphalt, wood, or any other surface other than described. This lift is only as strong as the foundation on which it is installed.

ANCHORING

This lift does not require bolting to the floor. If you choose to anchor the lift to the floor, follow the detailed instructions in the manual and the criteria above.